



Superlux® 舒伯乐

HD661

PROFESSIONAL MONITORING HEADPHONES

專業監聽級耳機

The HD661 is a closed-back, circumaural headphone which is excellent for live sound monitoring application because of its sound profile of depth of sound field. It's also suitable for studio and broadcast. Although suitable for a very wide range of applications, the exceptional attenuation of external noise of the HD 661 makes it particularly useful for use in a high noise environment.

The balanced, high definition and clear sound of the HD661 assures that a professional sound engineer can have full confidence when recording or monitoring. Its patented sturdy headband structure provides long-lasting durability even in challenging conditions, yet its light weight and optimized mechanical pressure provides long-term wearing comfort.

HD661是一支專業監聽等級封閉式耳機，其音場景深設計最適合作現場演出監聽使用，也可應用於錄音棚及廣播等。封閉耳罩隔音效果極佳，縱使在高噪音的環境或是戶外現場錄音都非常適用。其平衡而保真，清晰不漏細節的聲音表現，協助專業音響工程師在監聽時找出聲音的問題點。另外，專利自動調整的頭墊結構，柔軟的耳罩，提供良好的舒適性。

Contact

Marketing and sales
Superlux Taiwan
+886-2-26931323
sales@superlux.com.tw
support@superlux.com.tw

Manufacturing & logistics
Superlux Enterprise
Development(Shanghai)Co., Ltd.

連絡我們

中國地區營銷和業務
旭廣企業發展(上海)有限公司
021-69223756
superlux@online.sh.cn
support_cn@superlux.com.tw

國際營銷和業務
Superlux 舒伯乐 台灣
+886-2-26931323
sales@superlux.com.tw

www.superlux.com.tw





Superlux® 舒伯乐

HD661

PROFESSIONAL MONITORING HEADPHONES

專業監聽級耳機

- Exceptional design of depth of sound field and excellent for live sound monitoring application
- Dynamic, closed-back circumaural headphones
- High noise attenuation
- Ø40 mm high resolution drivers
- Patented self-adjusting headband for great fit and maximum comfort
- Rotating ear pad construction for convenient single-ear monitoring
- Detachable, single side cable
- Light weight
- Multicolor available 

- 極佳的音場景深設計，最適合作現場演出監聽
- 動圈、封閉式耳機
- 高隔離噪音效果
- Ø40 mm高解析驅動單元
- 專利自動調整頭墊
- 可分離的單邊直導線
- 輕量化設計
- 可內外翻動耳罩結構，易於作單耳監聽
- 多種顏色可選 

Accessories Furnished

1M straight cable model#FD1YW
3M straight cable model#FD3YW
Gold plated 1/8"(3.5mm) to 1/4"(6.3mm) adapter
Cable clip
Pouch

Specifications

Acoustic Design
Dynamic, closed-back
Driver
Ø40 mm, neodymium
Sensitivity
102 dB SPL (1mW) at 1KHz
Frequency Response
10 – 20,000 Hz
Maximum Input Power
200 mW
Rated Impedance
68 Ω@ 1KHz
Earpad
Leatherette
Head Band Pressure
Approx. 4.5 N
Cable
1-meter(3.3 ft.) & 3-meter (9.9 ft.)
straight cable, single-sided
Connector
Stereo mini jack
Net Weight
190 g (6.7 oz)

隨貨附件

1米直線，型號 FD1YW
3米直線，型號 FD3YW
3.5 / 6.3 mm 鍍金立體轉接頭
線扣
便攜袋

規格

聲學結構
動圈、封閉式
驅動單元
Ø40 mm，鈹鐵
靈敏度
102 dB SPL (1mW) @ 1KHz
頻率響應
10-20,000 Hz
最大輸入功率
200 mW
額定阻抗
68 Ω@ 1KHz
耳罩
人造皮
耳罩至耳朵壓力
約4.5牛頓
線材
1米及3米直線，單邊出線
接頭
立體3.5mm接頭
淨重(不含線)
190 g


Patented self-adjusting headband for maximum comfort

專利自動調整頭墊

Rotating ear pad for single-ear monitoring
可內外翻動耳罩以利單耳監聽

Detachable, single side cable
可分離單邊直導線

- A Patent Structure 專利結構
- B Detachable 可分離式
- C Rotating Ear Pad, 1 pair 耳罩一對
- D Foam Disk, 1 pair 防塵海綿一對
- E Cable Clip 線扣

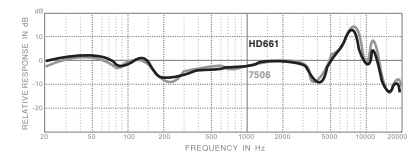

Both the HD661 and MDR-7506 have a similar frequency curve. The HD661 delivers a wide dynamic range and high resolution sound, presenting the crystal clear audio details demanded by professional users.

HD661與MDR-7506有相近的頻率響應。HD661的大動態範圍及高解析的特色，能真實而清晰地重現聲音的細節，是最佳的专业監聽等級應用的耳機。