

DE250 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 45 horn.

Throat Diameter	25 mm (1 in)
Nominal Impedance	8 Ω
Minimum Impedance	7.8 Ω
Nominal Power Handling	60 W
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	120 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	108.5 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	1 kHz - 18 kHz
Recommended Crossover	1.6 kHz
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	44 mm (1.7 in)
Winding Material	Aluminium
Inductance	0.11 mH
Flux Density	1.85 T
Diaphragm Material	Polyimide

- 120 W continuous program power capacity
- 1" horn throat diameter
- 44 mm (1.7 in) aluminium voice coil
- Polyimide diaphragm
- 1000 - 18000 Hz response
- 108.5 dB sensitivity

MOUNTING AND SHIPPING INFO

Two M6 holes 180° on 76 mm (3 in) diameter Three M6 holes 120° on 57 mm (2.2 in) diameter



Overall Diameter	120 mm (4.7 in)
Depth	62 mm (2.4 in)
Net Weight	2.15 kg (4.74 lb)
Shipping Units	1 pcs
Shipping Weight	2.21 kg (4.87 lb)
Shipping Box	120x120x65 mm (4.72x4.72x2.56 in)

SERVICE KITS

HF replacement-diaphragm	MMDE2508
--------------------------	-----------------



DE250 8 Ω

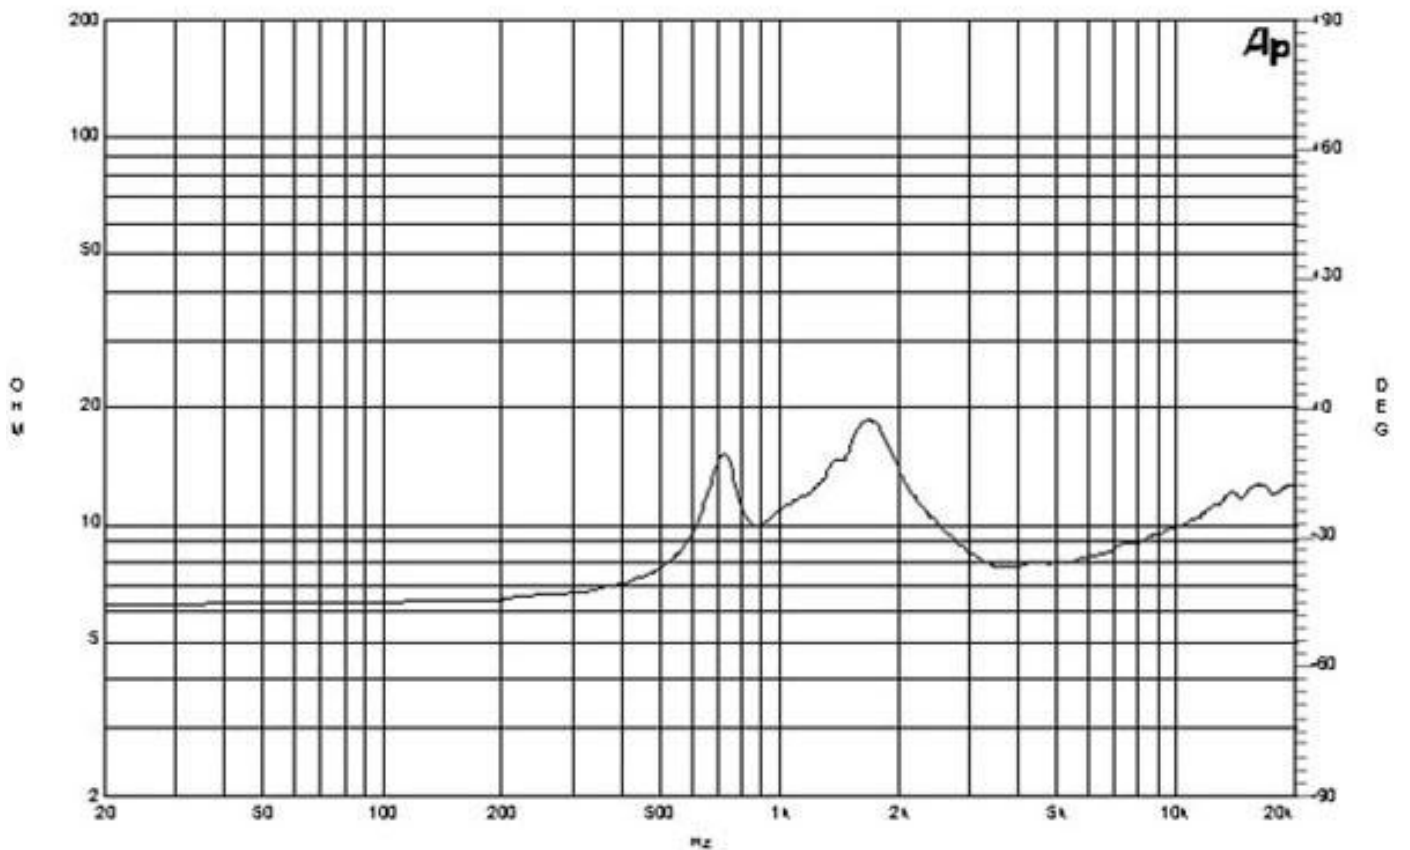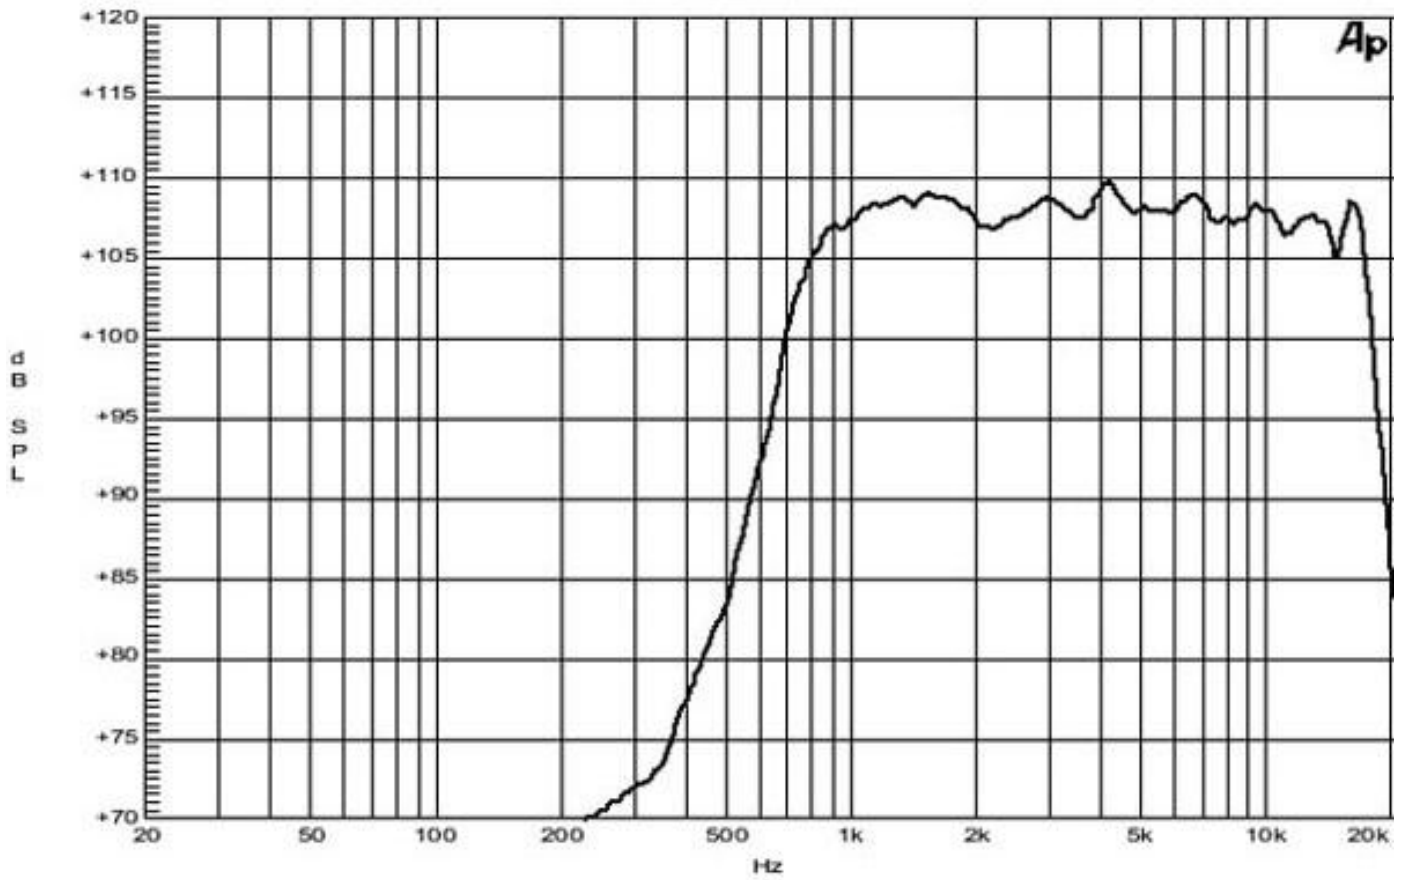

DE250 8 Ω

